![Gamber-Johnson Logo]

INSTALLATION INSTRUCTIONS

Product	**Revision**	**Form**
7160-1432	Rev. C	INST-972
GETAC B360 LAPTOP CRADLE		**Printing Spec:** PS-001

This instruction sheet is for the Getac B360 Laptop Cradle only. For instructions on features, set-up, and operation of the computer, please refer to the manual provided by Getac with the computer.

This cradle is designed to be used with a variety of Gamber-Johnson mounting systems. Installation instructions for other Gamber-Johnson products are provided with each individual product.

This instruction sheet is for the following products:

Item No. 7160-1432-00   Non-RF   (External Power Supply sold separately)
Item No. 7160-1432-03   Tri-RF   (External Power Supply sold separately)

Getac recommends using the following Power Adapters to power the computer. They can be ordered from Gamber-Johnson seperately.

7300-0471 - Auto   (12-32 Vdc input) - Available with the cradle as KIT **7170-0795**
7300-0413 - Isolated (12-32 Vdc Input)
7300-0412 - Isolated (20-60 Vdc input)
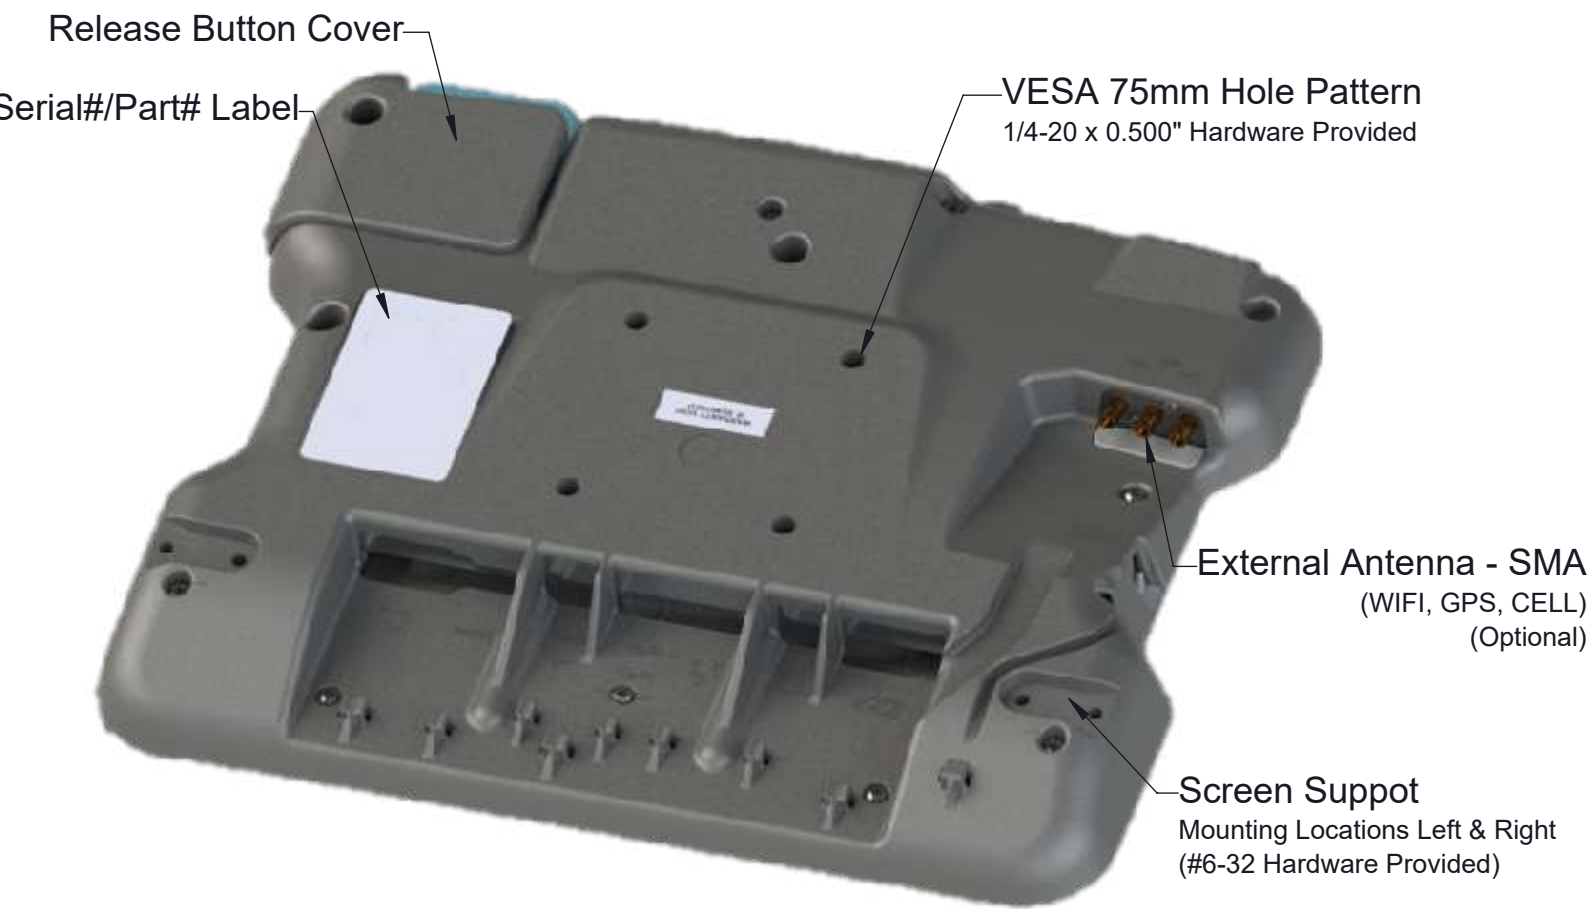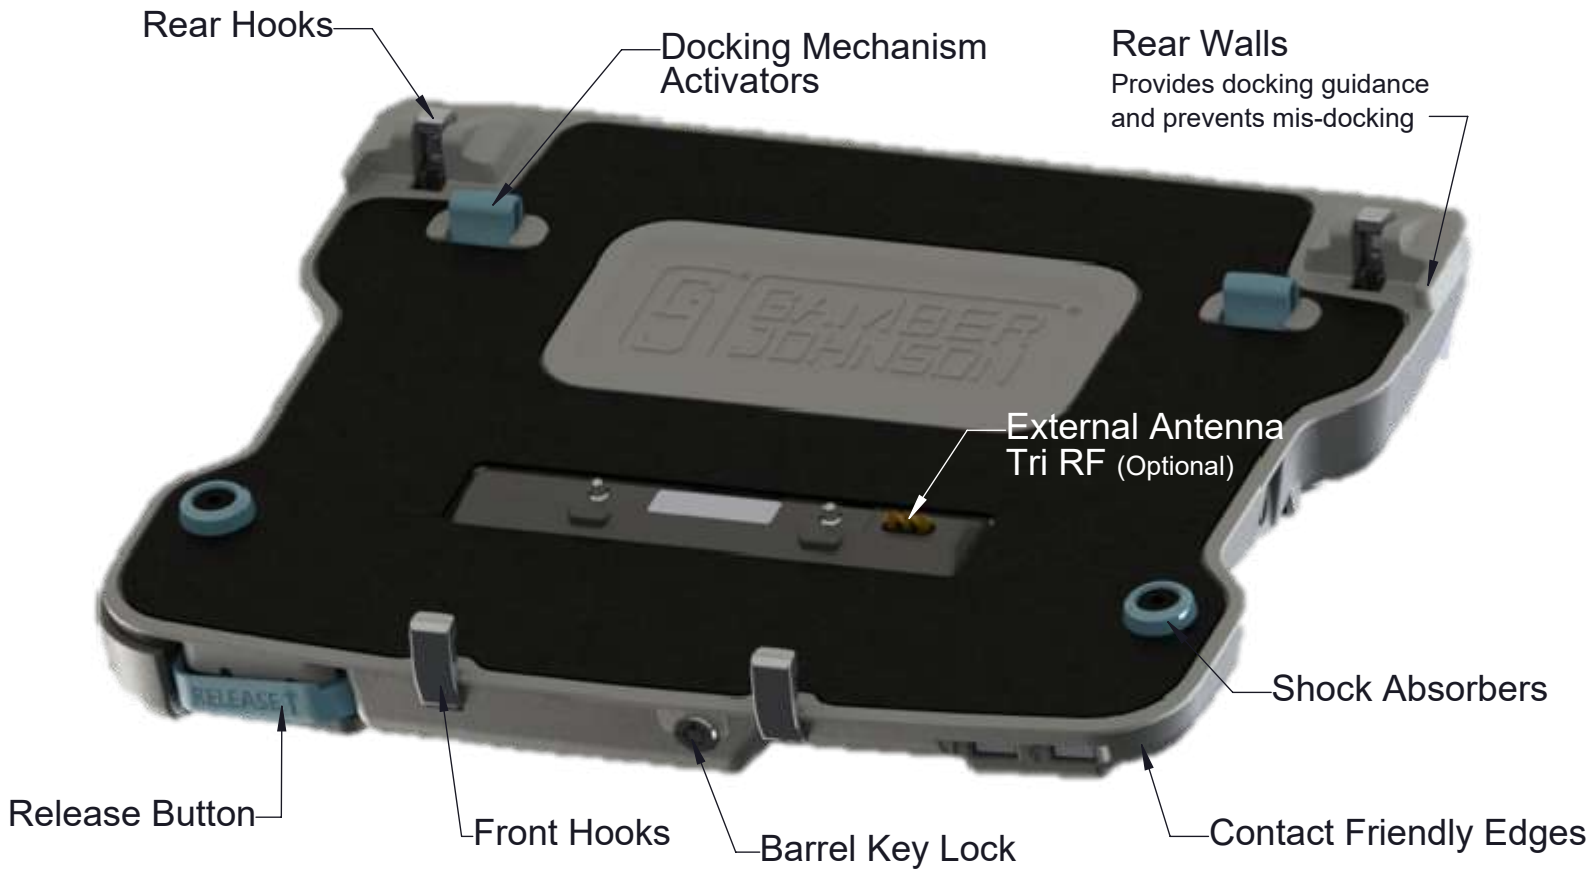**7300-0416** - Isolated (72-110 Vdc input)

If you need assistance or have questions, call Gamber-Johnson at 1-800-456-6868

FEATURE IDENTIFICATION

Rear Hooks

Docking Mechanism
Activators

Rear Walls
Provides docking guidance
and prevents mis-docking

External Antenna
Tri RF (Optional)

Shock Absorbers

Release Button

Front Hooks

Barrel Key Lock

Contact Friendly Edges

Release Button Cover

Serial#/Part# Label

VESA 75mm Hole Pattern
1/4-20 x 0.500" Hardware Provided

External Antenna - SMA
(WIFI, GPS, CELL)
(Optional)

Screen Suppot
Mounting Locations Left & Right
(#6-32 Hardware Provided)

DOCKING AND UNDOCKING THE COMPUTER

OPERATION - DOCKING

1. Insert the front of the laptop into the front hooks of the dock. The walls on the dock will help guide the computer into place.
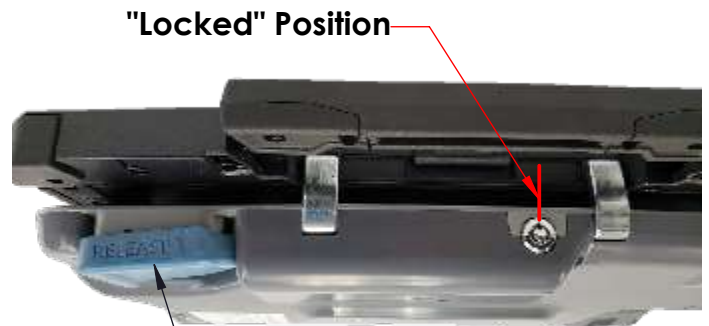
2. Rotate the back of the laptop onto the dock and push down in the center or both top corners, overcoming the resistance until an audible click is heard. The blue latch will spring down when the laptop is fully docked. This can be done one or two handed.

3. Optional - With the dock in the "Latched" position, turn the lock to the "LOCKED" position (CW). This will lock the laptop in the dock.

Push Down

Insert Front First

"Un-Locked" Position

"Un-Latched" Position

"Locked" Position

"Latched" Position

OPERATION - UNDOCKING

1. Turn the lock to the "UNLOCKED" position (CCW).

2. With your hand at the front left corner of the dock, pull up on the blue Release Button until the springs release the laptop.

3. Remove the laptop by rotating it up and out of the dock. This can be done one or two handed.

Pull Latch Up

Rotate Laptop up and out of Dock

Screen Support Installation

Screen supports are recommended on all laptop dock/cradles in high-vibration environments.

(1) screen support is included with each Getac B360 assembly, another may be purchased from www.GamberJohnson.com. Part Number: 7110-1332

Screen Support Mounting Locations

Use supplied #6-32 screws to attach screen support to the left or right mounting location, do not over-torque screws.

Reccomended torque is 8-11 in/lbs.